



Green Laundry



• Stronger • Smarter • Healthier • More Efficient

LGLaundry.vn

Máy giặt CWT 17

Cảm biến cân bằng giúp người dùng giặt hết lồng giặt 150L

Thiết kế có thể xếp chồng nhau thuận tiện mọi không gian



Nhanh hơn

Cảm biến cân bằng Gyro Balancing Sensor phát hiện chính xác chuyển động của lồng giặt để kích hoạt thuật toán phù hợp nhất cho chu trình giặt, đảm bảo chu trình giặt hoàn tất trong vòng 36 phút.



Kháng khuẩn

Hệ thống LG Hygiene Care System kháng khuẩn luôn giữ cho máy giặt của bạn sạch sẽ. Bạn cũng có thể tự kích hoạt tính năng vệ sinh này trước, trong hay sau mỗi lần giặt.



Mạnh hơn

Giải pháp thông minh LG Smart Solution sẽ tối đa hóa lợi nhuận của bạn một cách thông minh nhất bằng cách giám sát hoạt động của máy từ xa - LG's Remote Monitoring App mang đến giá trị hiện đại tiên tiến



Bền bỉ

- Hệ thống Inverter biến tần duy nhất trong dòng máy công nghiệp trên thế giới.
- Hệ thống cân bằng con quay hồi chuyển mới nhằm triệt tiêu ma sát và độ rung.

Built for More, Built for Speed

Do more in less time with the high-capacity stackables.

Khả năng giặt tiên tiến và bền bỉ vượt trội

17 kg
Bigger Capacity

NEW
NEW
Stackable



Trusted Worldwide to Help Businesses Succeed

Giải pháp giặt xanh là hoàn toàn phù hợp với xu thế tiến bộ xã hội và công nghệ.

Chúng tôi luôn: “Mạnh hơn”, “Tiên tiến hơn”, “Bền bỉ hơn”, và “Hiệu quả hơn”



Stronger



Smarter



Healthier



More Efficient




CẢM BIẾN CÂN BẰNG

Designed to Last


LG's professional grade parts are built to last repeated use, meaning less repairs and more profits.

*Noise levels may vary based on machine settings & other factors.



Step 1

Noise + Vibration
During Washing



Step 2

Gyro Sensor Detection



Step 3

Noise +
Vibration Reduction

Cảm biến cân bằng và Con quay hồi chuyển giúp phát hiện chính xác các chuyển động của lồng giặt để kích hoạt thuật toán thích hợp nhất cho chu trình giặt.



Dual Spin Algorithm Thuật toán quay kép

Có 2 chế độ linh hoạt là cảm biến thông thường và siêu cảm biến



New Quattro Damping System

Hệ thống giảm chấn mới tích hợp với hoạt động cảm biến cân bằng và hệ thống biến tần được thuật toán xử lý chính xác và đồng bộ để mẻ giặt được hoàn hảo



HỆ THỐNG THÔNG MINH

Smart Control, Smart Business

Giải pháp thông minh tích hợp là một dịch vụ Đám mây để kết nối công việc quản lý và máy móc tới người quản lý kinh doanh cũng như người dùng sau cùng



CHỨC NĂNG KHÁNG KHUẨN TIỀN PHONG

WHY? We Provide Hygiene Solution with 3+1 Steps

Quy trình kháng khuẩn trước, trong và sau mỗi lần giặt.



Step 1

Clean Tub Cycle

Trước chu trình giặt



Step 2

Hygiene Cycle

99.9% Hygienically Trong chu trình giặt



Step 3

Intensive Tub Cleaning Cycle

Làm sạch bên ngoài sau mỗi chu trình



Step 4

Drying

Sterilize to Last Clean

Sấy nhân đôi kháng khuẩn

WASHER



DRYER



99.9% Germs Removed

Chức năng kháng khuẩn 99.9%
được chứng nhận bởi
Intertek Hoa Kỳ.



KHÁNG KHUẨN CẢ THẾ GIỚI CỦA BẠN

What is Important for Success of Laundromat?




Khách hàng và chính bạn được bảo vệ tối đa

The Hygiene Clean System ensures your washers are clean before, during and after each use. There are three cycles available: first, the Clean Tub Cycle that takes just three minutes to clean the tub before use; next, the Hygiene Cycle which sanitizes your fabrics; and last, an Intensive Tub Cleaning Cycle that can be run once the load is done.



/ 3+1 Hygiene Care Laundry System /


A sanitizing wash and dry and everything in between.

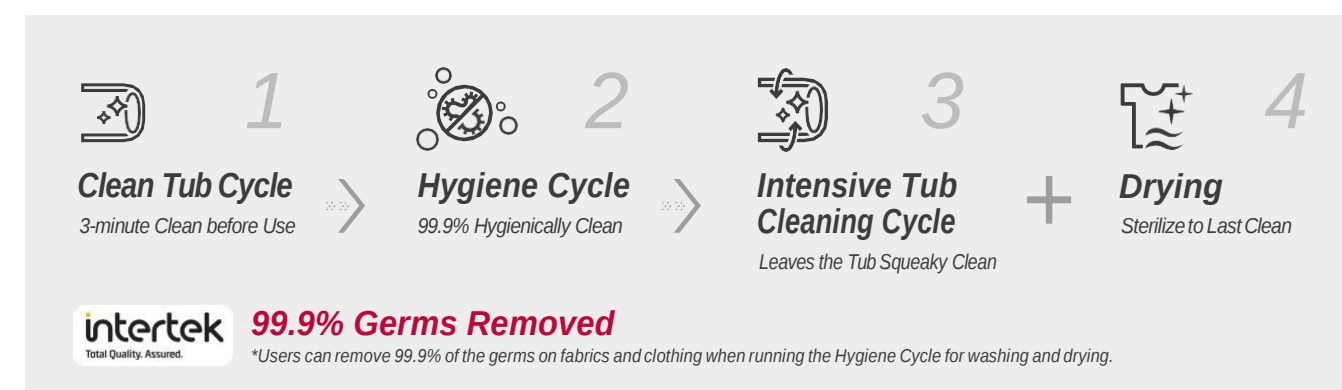

“Discover opportunities to drive profit with LG Saving System.

/ Saving System /

Run your laundromat more efficiently by saving water and energy, thus improving your bottom line.

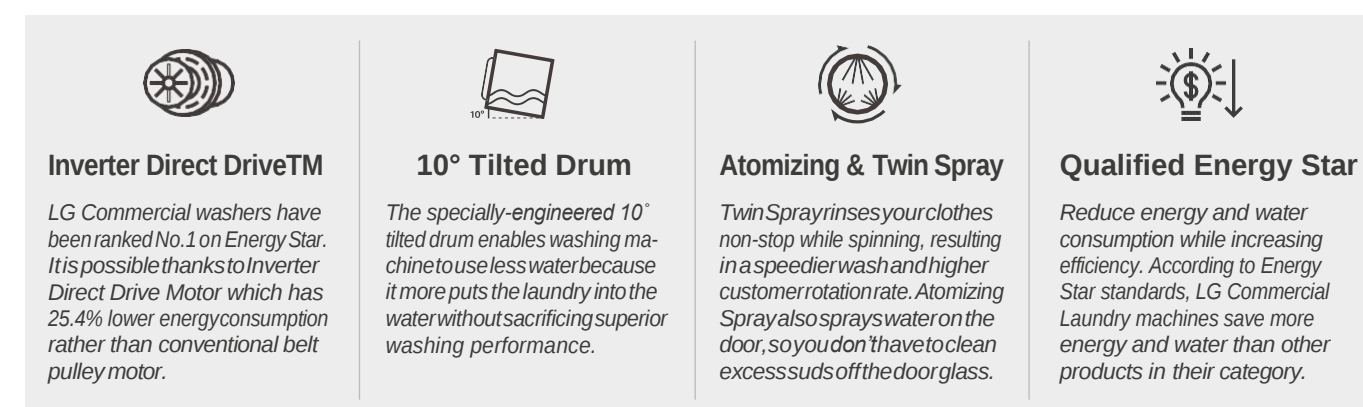

Are you looking for a quiet and sturdy machine ?



Mạnh mẽ và Bền bỉ

“

LG's professional grade parts are built to last repeated use, meaning less repairs and more profits.

The LG Inverter Direct Drive Professional Motor™ eliminated the traditional belt and pulley system, which means less moving parts. Less moving parts means less wear and tear, making our LG washing machines much more durable. To ensure longlasting performance, the shaft that connects the drum and motors gets a heat treatment, which protects against wear and tear from repeated use. LG dryers have a Tempered Glass door, making them less susceptible and you can see through the door to check the status of your load.



| Inverter Direct Drive™ |

Động cơ Inverter duy nhất phân khúc công nghiệp

Hệ thống dẫn động Inverter trực tiếp nối với lồng giặt vận hành theo thuật toán và chế độ giặt tiên tiến giúp đạt hiệu quả tối đa và tăng tuổi thọ máy.

Loại bỏ hoàn toàn dây curoa và các phát sinh của nó, loại bỏ tiếng ồn.

Conventional Motor

• Belt & Pulley



VS

Inverter Direct Drive™

• No Belt & Pulley
• Less Noise & Vibration
• Powerful Washing Performance



| Gyro Balancing System |

Low Noise, Less Vibration


LG Gyro Balancing System provides optimized performance through advanced algorithm, which allows for errorless spin entry and on time cycle completion.

Gyro Sensing + Quattro Damping

LG Gyro Balance System provides optimized performance through advanced algorithm.



>>



>>



Are You Looking for the Smartest Way to Run Business?

Tiết kiệm hơn, Năng suất hơn, Chất lượng hơn

“Owners and users can manage their laundry productivity remotely with the LG Remote Laundry App.

Both owners and users can manage their laundry productivity remotely with the LG Remote Laundry App. Owners can monitor revenue, set up new machines, manage error messages and get alerts when there is a problem in the laundromat. Users can also get a notice sent to the app when machines are available, so there is no need to wait in the laundry room for vacant machines. When the laundry is about to be done, the user can get an alert to head back to the laundromat.



/ LG Remote Laundry Solution /


Quản trị thông minh, đơn giản

Streamline Maintenance can monitor conditions and detect errors anytime and anywhere; adjust settings and control individual locations and even specific machines.



Xu hướng tiêu dùng hiện đại

Now with the ability to check laundry status with their smartphone, customers are free to the gym or shop while they wait for their laundry to finish.

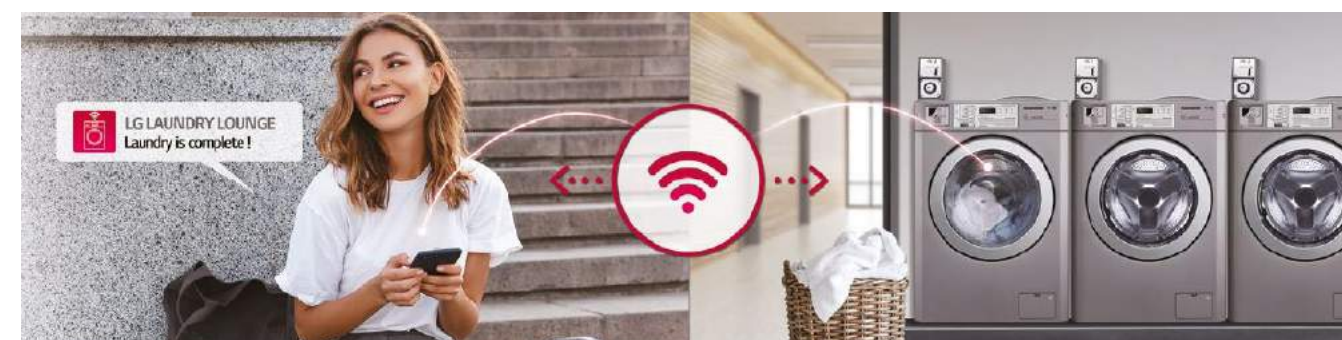

Các tính năng vượt trội khác

Stronger Mạnh mẽ hơn

Premium PowderCoating

Our powder coated finish creates the same durability as it does when painting a car. It is sure to last long and provide an easy to clean exterior.




Inverter Direct Drive™

Unlike the traditional belt and pulley system, the LG commercial laundry drum is directly attached to the motor providing superior durability and reliability. Fewer parts equals fewer repairs.



Gyro Balancing System


Gyro Balancing System makes longer lifespan to detect vibration and minimize friction damage.

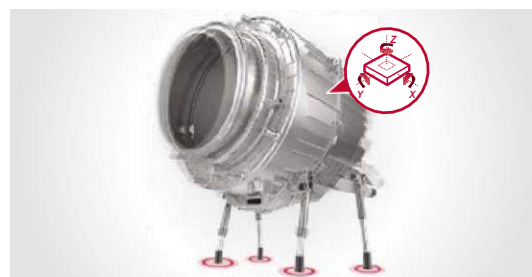

Healthier Bảo vệ gia đình

Hygiene Care System

The Hygiene Cycle System ensures your washers are clean before, during and after each wash.

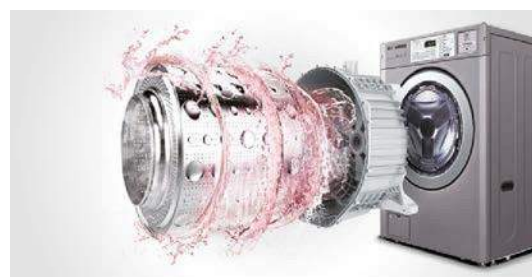

Auto Dosing System

Simple to connect automatic detergent/chemical injection system.

*Autodosing Pump (Purchase Separately)



More Efficient Hiệu quả hơn

Space Saving

The small cabinet size with bigger washing capacity and stackable design allows more customers and more machines in limited space.



10° Tilted Drum

LG's commercial washer tub is tilted 10°. It enables the washer to have higher water level compared to competitors. This allows us to use less water while not sacrificing superior wash performance.



Atomizing & Twin Spray

Twin Spray rinses your clothes non-stop while spinning, resulting in a speedier wash and higher customer rotation rate. Atomizing Spray also sprays water on the door, so you don't have to clean excess suds off the door glass.



Smarter Thông minh hơn

Management Web

Monitor your laundromat operations remotely with the LG management Web. You can get real-time status updates and diagnose problems remotely, allowing you to maximize productivity.



User App

LG Laundry Lounge App makes it easier than ever to do their laundry remotely, saving them precious time.



Industry Stories to Inspire Your Business

Take a look at various sites for your business.

Laundromats

The Perfect Set-up for Driving Profit. Optimized business support from planning to service.



On-Premise Laundry

Suitable for a wide range of businesses. Because it is powerful, durable and more over hygienic




Multi-Housing

Perfect Smart Solution for Multi-Housing. With a laundry alert system, there's no need to wait around for your laundry to finish. LG Smart Solutions make it possible from start to finish.



Thiết kế hoàn hảo cho môi trường kinh doanh

Take your business to the next level with LG VR Simulator.

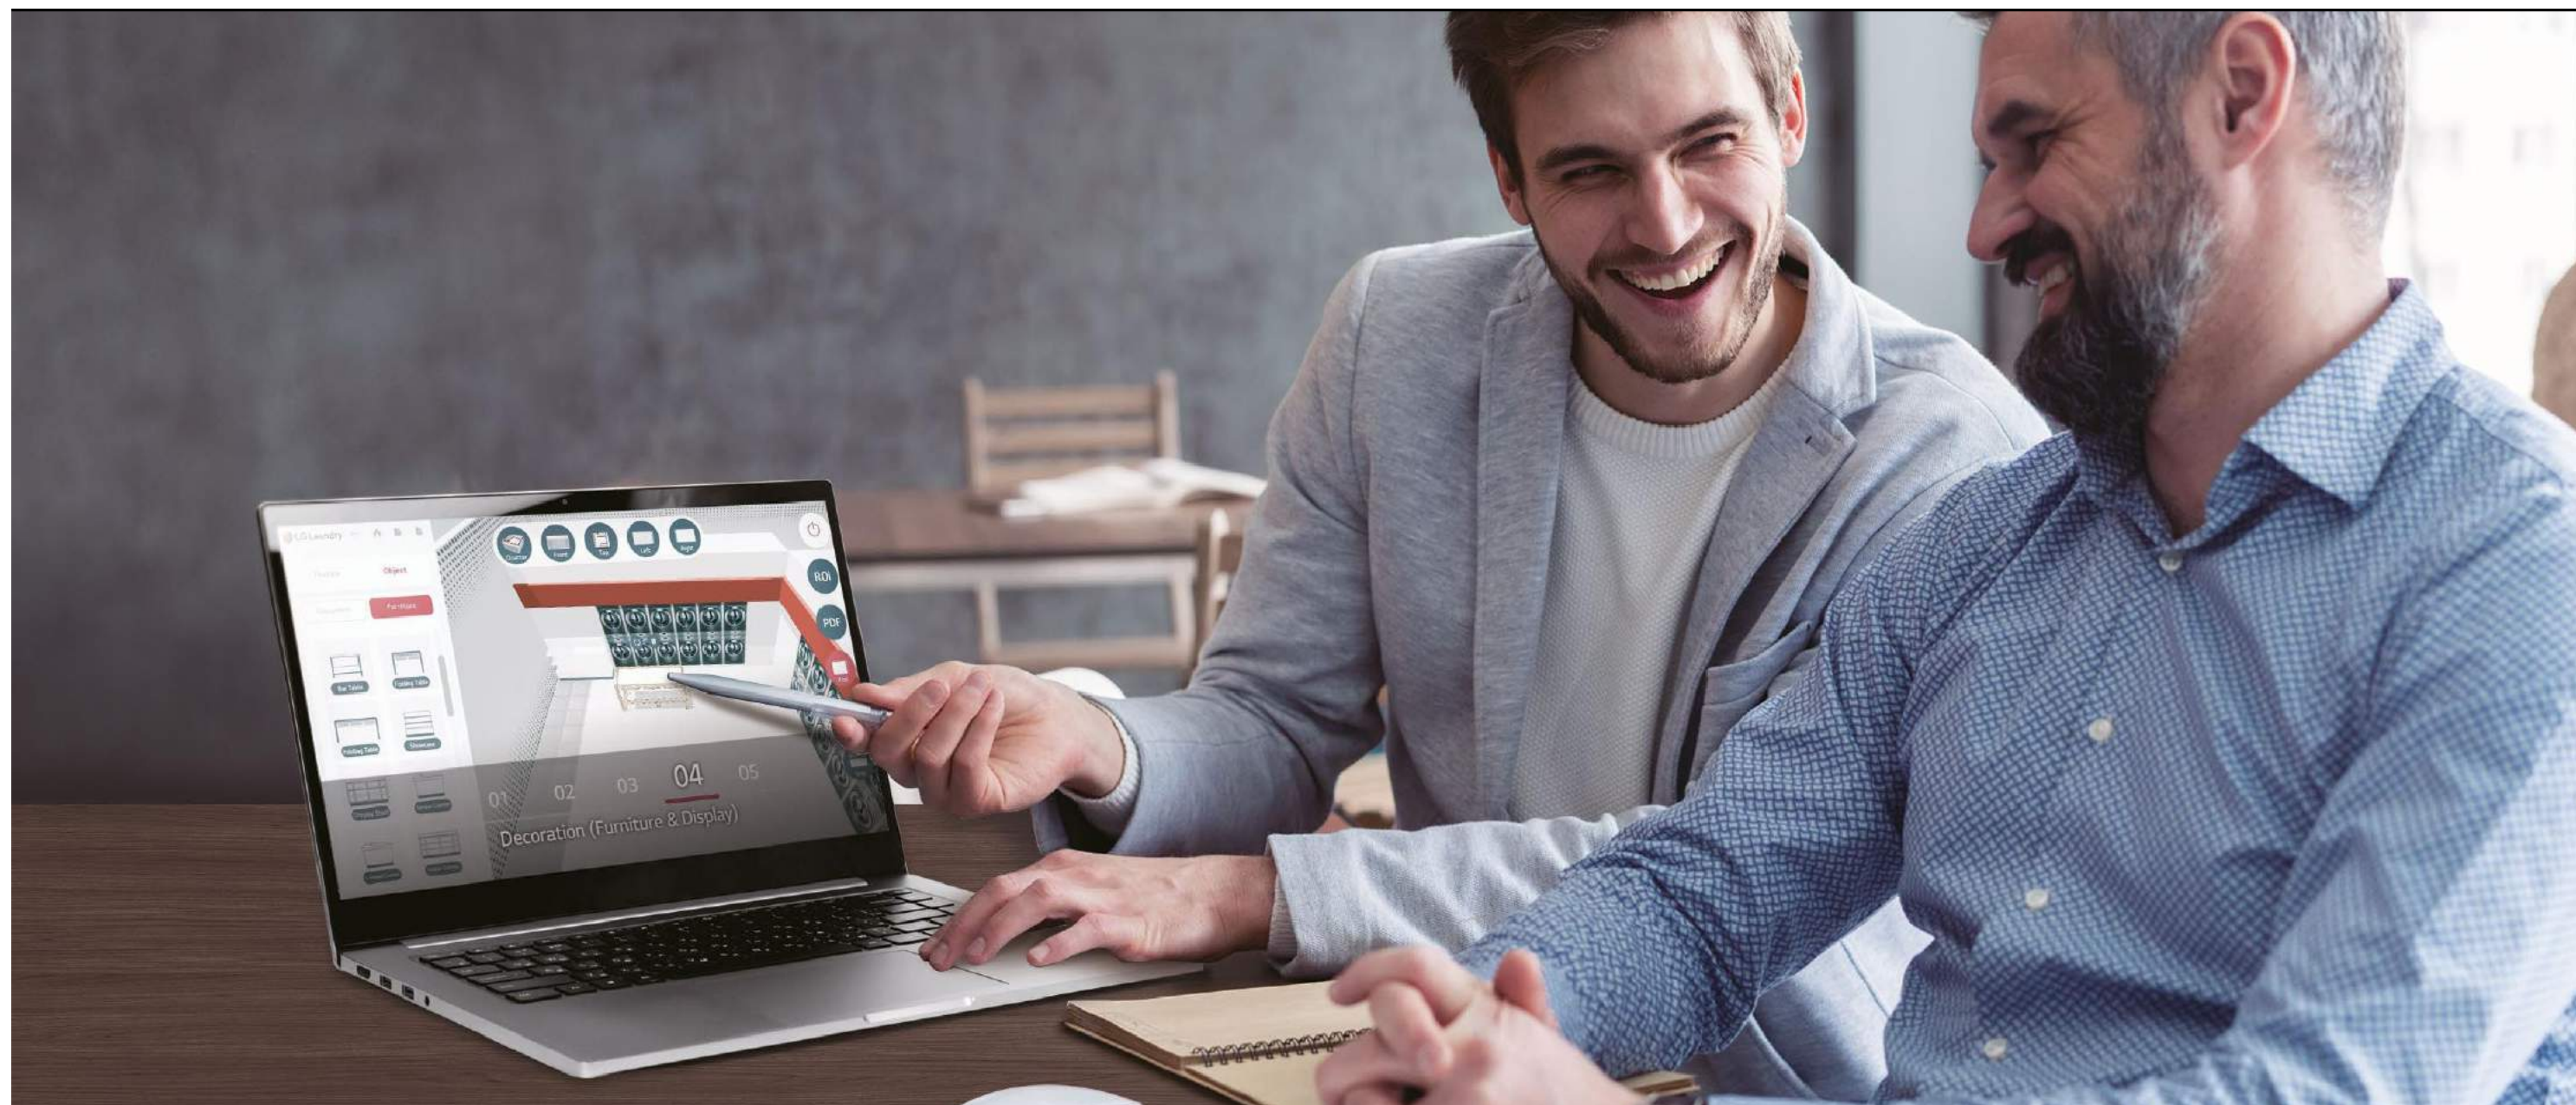

Exterior to Attract Customer

LG authorized signage and posters are available to maximize business visibility and to encourage customers to visit the laundromat.



Free Consulting through LG VR Simulator

The LG VR simulator defines the conditions and shapes of the space, and allows you to design the optimal laundromat layout. With 3D VR, you can envision your dream laundromat and even analyze your investment profitability.



MÁY GIẶT CWG 15



		Không sx nước nóng (nồi bình nóng ngoài)	Tự sản xuất nước nóng
CYLINDER / LỒNG GIẶT			
Drum Volume / Thể tích	(l)	105	105
Diameter / Đường kính	(mm)	560	560
Depth / độ sâu	(mm)	420	420
DIMENSIONS / KÍCH THƯỚC			
Product (WxHxD) /	in	27 x 38.7 x 30.2	27 x 38.7 x 30.2
DxRxH	mm	686 x 983 x 767	686 x 983 x 767
With Door Open / cửa mở	mm	1,291	1,291
Carton (WxHxD)	in	29.7 x 44.4 x 31.3	29.7 x 44.4 x 31.3
	mm	755 x 1,127 x 795	755 x 1,127 x 795
Weight Máy/ Carton / Cân nặng	kg	87 / 96	87 / 96
SPEED / TỐC ĐỘ			
Wash / Giặt	RPM	40~50	40~50
Extract / Vắt	RPM	1,200	1,200
G-force / Gia tốc	G	451	451
RATING / ĐIỆN NĂNG⁰⁾			
Electric Ratings	V/Hz/A	220~240 / 50 or 60 / 2.1~2.3 (Heating 8.4~9.6) ¹⁾	220~240 / 50 or 60 / 13.3~17.5
*CONSUMPTION INDEX⁰⁾²⁾			
Water / Nước	lít	50	45.5
Electricity / Điện	kW / lần giặt	100~120 / 0.5 (Heating 0.85~1.0) ¹⁾ 220~240 / 0.5 (Heating 1.85~2.3) ¹⁾	3.6~3.8 kw
NOISE & CYCLE TIME			
Noise Level Tiếng ồn	dB	< 50 dB	< 50 dB
Một chương trình giặt	min	36	59 (60°C) Courše
SYSTEM & CONTROL			
Inverter Direct Drive Motor / Động cơ		có	có
Heating Element	V/W	220~240 / 2,000 ¹⁾	220~240 / 3,200
Drain System / hệ thống nước xả		BLDC Pump Drain	
Auto Dosing Interface / Nước giặt xả		có	có
Gyro Sensor / Cảm biến thuật toán		có	có
Damper / Chông rung		4 Chân chống rung	4 chân chống rung
PROGRAMS			
Program List / Chương trình	Hot or Hygiene (Short Key) ⁴⁾		90°C(194°F)
	*Pre-Clean (Long Key) ⁵⁾		
	Warm		75°C(167°F)
	Cold		60°C(140°F)
	Delicates		40°C(104°F)
	Add Super Wash (Card & Coin) / Custom PGM (OPL) Custom PGM (OPL)		Cold (Short Key) *Custom PGM (Long Key)
EXTERNAL FINISH			
Drum / Lồng giặt		Stainless Steel	Stainless Steel
CIRCUIT PROTECTION			
PCB Fuse - Main Control Board	amps	12 (220~240V)	12 (220~240V)
PCB Fuse - Filter Assembly	amps	15	15

1. Only for Hygiene or tub clean cycle using heater.


0) Without loading / Default water level (Non heater/Heater) : High/Mid / Non heating course

1) Washer detects water temperature and adjusts heating time automatically if hot water supply is available

2) If H4CS is dISb(disable), Hot cycle can be run. If H4CS is EnAb(enable), hygiene cycle can be run.

3) When you press button for 3 seconds, Hot or Hygiene cycle will be changed to Pre-Clean cycle. (If ICL is EnAb(enable), Pre-Clean cycle can be run.)

4) When you press button for 3 seconds, Cold cycle will be changed to Custom PGM. (Cold for coin model, Custom PGM for OPL model)

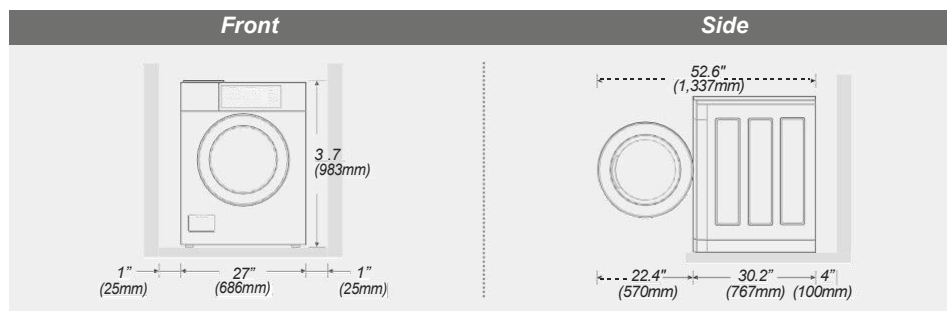

MÁY SẤY CDG 15




		Gas Ga	Electricity Điện
CYLINDER / LỒNG SẤY			
Drum Volume / Thể tích	lít	210	210
Diameter / Đường kính	mm	670	670
Depth / Chiều sâu	mm	575	575
DIMENSIONS / Kích thước			
WxHxD / DxRxH	in	27 x 38.7 x 30.1	27 x 38.7 x 30.1
	mm	686 x 983 x 764	686 x 983 x 764
With Door Open / Cửa mở	imm	1,264	1,264
Thùng Carton (WxHxD)	In	29.9 x 46.1.4 x 31.3	29.9 x 46.1.4 x 31.3
	Mm	760 x 1,170x 795	760 x 1,170x 795
Weight (Product/ Carton)	Lkg	59 / 65	59 / 65
RATING / ĐIỆN NĂNG			
Electric Ratings	V/Hz/A	220~240/50/2.4 220/60/3	220~240/50/22.5 220/60/21 240/50/19.5 ¹⁾
*CONSUMPTION INDEX PER CYCLE⁰⁾			
Gas / Ga	W	5.81	-
Electricity / Điện	W	0.35 (Max 0.7)	4.5~5.4
SYSTEM & CONTROL / Điều khiển			
Heating Type		Gas (LNG/LPG) ²⁾	Electric
Type of Drying		Ventilation	Ventilation
Air Flow	CFM	160	160
Motor	kW	0.25	0.25
Gas Ratings ⁰⁾	kW/BTU	5.8/20,000	-
Heating Element	kW	-	5.4
Program Duration in Minutes (Default) ⁰⁾	min	45 (NA) / 50 (EU) / 45 (Australia)	45 (NA)/50 (EU)/ 45 (Australia)
CONNECTIONS / Kết nối			
Air Outlet Diameter	Mm	100	100
Exhaust Airflow Diameter	mm	100	100
PROGRAMS			
Program List / chương trình vận hành		High Temp	High Temp
		Med Temp	Med Temp
		Low Temp	Low Temp
		No Heat	No Heat
EXTERNAL FINISH			
Drum / Lồng sấy		Alcosta	Alcosta

0) This specification is different by countries. For the most accurate information, please refer to service manual.

1) 4,500W for some countries due to power limitation (e.g. Australia).

2) Gas type depends on country sales model.

Weather Hood Type	Number of 90° Elbows	Maximum length of 4" (10.2cm) diameter rigid metal duct	Maximum length of 4" (10.2cm) diameter flexible metal duct
Recommended	0	65 feet (19.8m)	45 feet (13.7m)
	1	55 feet (16.8m)	35 feet (10.7m)
	2	47 feet (14.3m)	30 feet (9.1m)
	3	36 feet (11.0m)	25 feet (7.6m)
	4	28 feet (8.5m)	20 feet (6.1m)
Use Only for Short Run Installations	0	55 feet (16.8m)	35 feet (10.7m)
	1	47 feet (14.3m)	27 feet (8.2m)
	2	41 feet (12.5m)	21 feet (6.4m)
	3	30 feet (9.1m)	17 feet (5.2m)
	4	22 feet (6.7m)	15 feet (4.5m)

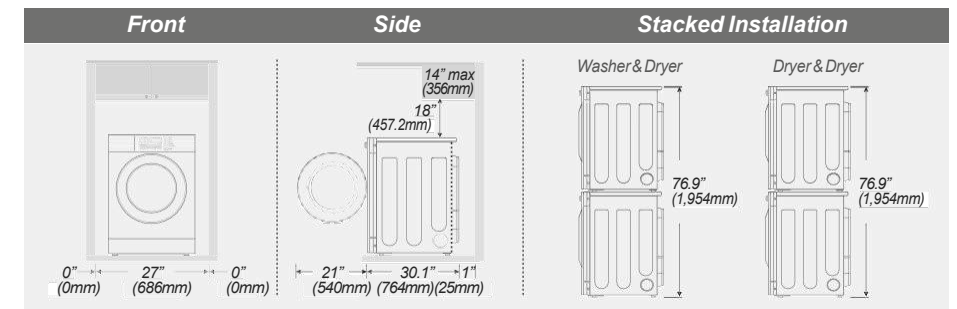


MÁY GIẶT CWT 17



		Không sx nước nóng (nồi bình nóng ngoài)	Tự sản xuất nước nóng
CYLINDER / LỒNG GIẶT			
Drum Volume / Thể tích	Lít	150	150
Diameter / Đường kính	mm	615	615
Depth / Độ sâu	mm	520	520
DIMENSIONS / KÍCH THƯỚC			
Product (WxHxD)/ DxRxC	mm	737 x 1,036 x 814	737 x 1,036 x 814
With Door Open / Cửa mở	mm	1,370	1,370
Thùng Carton (WxHxD)	mm	788 x 1,125x 846	788 x 1,125x 846
Weigh(Product/Carlton Cân nặng Kg		100 / 112	100 / 112
SPEED / Tốc độ			
Wash / Giặt	RPM	46	46
Extract(High Speed) / Vắt	RPM	1,000	1,000
G-force / Gia tốc	G	342	342
RATING / ĐIỆN NANG			
ElectricRatings	V/Hz/A	220~240 / 50 or 60 / 2.1~2.3 (Heating 9.1~10) ¹⁾	220~240 / 50 or 60 / 13.3~17.5
*CONSUMPTION INDEX ⁰⁾²⁾			
Water / Nước	Lít	62	47
Electricity / Điện	V/kW	100~120 / 0.5(Heating 0.85~1.0) ¹⁾ 220~240 / 0.5(Heating 2.0~2.4) ¹⁾	220~240 / 3.2~3.8
NOISE & CYCLE TIME			
Noise Level(Sound Power)	dB	< 50	< 50
Thời gian giặt mặc định	min	36 phút	59 phút
SYSTEM & CONTROL			
Inverter Direct Drive Motor		có	có
HeatingElement	V/W	220~240 / 2,000 ¹⁾	220~240 / 3200
Drain System / Bơm xả		BLDC	BLDC
Emergency Stop Button		O (OPL Only)	O (OPL Only)
Auto Dosing Interface		Có	có
Gyro Sensor / Cảm biến thuật toán		Có	Có
Damper / Chông rung		4 hệ thống	4 hệ thống
PROGRAMS ⁰⁾			
Program List / Chương trình vận hành	Hot*		90°C
	Warm*		75°C
	Cold*		60°C
	Delicates*		40°C/30°C
	Add SuperWash (Card & Coin)/ 20 Custom PGM (OPL)		Cold * Custom PGM ³⁾
EXTERNAL FINISH			
Drum/ Lồng giặt		Stainless Steel	Stainless Steel
CIRCUIT PROTECTION			
PCBFuse-Main ControlBoard	amps	12 (220~240V)	12 (220~240V)
PCBFuse-FilterAssembly	amps	15	15

*Dimensions and weights are approximatm.,,mmm e. *Design, features, and specifications subject to change without notice.
*Some models may not be available for sale in certain countries. *Model name may vary by country
*Energy Course available
0) This specification is different by countries. For the most accurate information, please refer to service manual.
1) Only fo tub clean cycle using heater.
2) Based on DOE J2/J1 testing
3) When you press button for 3 seconds, Cold cycle will be changed to Custom PGM. (Cold for coin model, Custom PGM for OPL model)

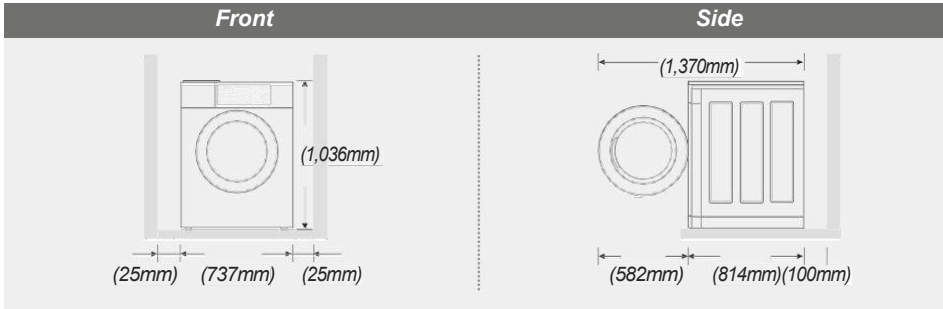

MÁY SẤY CDT 17



		GAS
CYLINDER / LỒNG SẤY		
Drum Volume / K Thước	Lít	260
Diameter / Đường kính	Mm	720
Depth / Chiều sâu	Mm	620
DIMENSIONS / KÍCH THƯỚC		
Product (WxHxD)/ DxRxC	mm	737 x 1,022 x 810
With Door Open / Cửa mở	Mm	1350
Thùng Carton (WxHxD)	mm	788 x 845 x 45.1
Weight (Product/Carlton)	Kg	149 / 167
RATING / ĐIỆN NANG		
Electric Ratings	V/Hz/A	220/60/5
CONSUMPTION INDEX (PER CYCLE) LƯỢNG ĐIỆN TIÊU THỤ MỖI LẦN SẤY		
Electricity	kW	0.35
SYSTEM & CONTROL HỆ THỐNG ĐIỀU KHIỂN		
Heating Type		Gas (LNG/LPG) ¹⁾
Type of Drying		Ventilation
Air Flow	CFM	210
Gas Ratings ⁰⁾	kW/BTU	7.4 / 25,000
Motor	kW	0.33
Program Duratin in Minutes (Default) ⁰⁾	min	40
CONNECTIONS KẾT NỐI		
Air Outlet Diameter	mm)	100
Exhaust Airflow Diameter	mm	100
PROGRAMS		
Program List/ Chương trình vận hành		High Temp
		Med Temp
		Low Temp
		No Heat
EXTERNAL FINISH		
Drum / Lồng sấy		Stainless Steel / Inox

*Dimensions and weights are approximate. *Design, features, and specifications subject to change without notice.
*Some models may not be available for sale in certain countries. *Model name may vary by country
0) This specification is different by countries. For the most accurate information, please refer to service manual.
1) Gas type depends on country sales model.

Weather Hood Type	Number of 90° Elbows	Maximum length of 4" (10.2cm) diameter rigid metal duct	Maximum length of 4" (10.2cm) diameter flexible metal duct
Recommended	0	65feet(19.8m)	45feet(13.7m)
4" (10.2cm)	1	55feet(16.8m)	35feet(10.7m)
	2	47feet(14.3m)	30 feet(9.1m)
	3	36feet(11.0m)	25 feet(7.6m)
	4	28 feet(8.5m)	20 feet(6.1m)
4" (10.2cm) Use Only for Short Run	0	55feet(16.8m)	35feet(10.7m)
	1	47feet(14.3m)	27 feet(8.2m)
	2	41feet(12.5m)	21 feet(6.4m)
	3	30 feet(9.1m)	17 feet(5.2m)
2-1/2" (6.35cm)	4	22 feet(6.7m)	15 feet(4.5m)

